


7000V Series Reflector

for Troffer and Surface Fixture Retrofit

7000V Series Reflector Kit is an economical one-piece reflector used to delamp fluorescent recessed / grid troffers. This reduces energy, improves efficiency and keeps light loss to a minimum. The 7000V Reflector is designed and manufactured in compliance with U.L. Standards for retrofit reflectors.

Catalog Number	Description
RA 7014 Kit	(1) RA 6014 1-lamp Reflector for 1' x 4' Troffer, (2) RA 410 Socket Plates, (4) TEK Screws
RA 7022V Kit	(1) RA 6022VT2 2-lamp Reflector for 2' x 2' Troffer, (2) RA 400V Socket Plates, (4) TEK Screws
RA 7024V Kit	(1) RA 6024VT2 2-lamp Reflector for 2' x 4' Troffer, (2) RA 400V Socket Plates, (4) TEK Screws
RA 7032V Kit	(1) RA 6032V 3-lamp Reflector for 2' x 2' Troffer, (2) RA 400V-T83L, (4) TEK Screws
RA 7034V Kit	(1) RA 6034V 3-lamp Reflector for 2' x 4' Troffer, (2) RA 400V-T83L, (4) TEK Screws

NOTE: For Highly Reflective Specular Aluminum, delete prefix "RA" and replace with "RM" or for White Aluminum delete "RA" and replace with "RW". Also available in 20 pack kits.

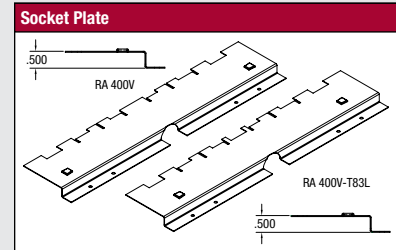


7000V Series Reflector

for Troffer and Surface Fixture Retrofit

7000V Series Reflector

for Troffer and Surface Fixture Retrofit

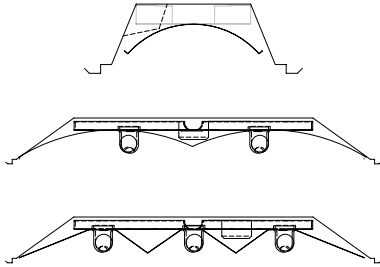

Efficiency:
 RA: 86% Std Specular
 RM: 94% Specular
 RW: 90% Diffuse White

COEFFICIENTS OF UTILIZATION

Room Cavity Ratio	CEILING CAVITY REFLECTANCE											
	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
0	101	101	101	101	98	98	98	98	94	94	94	
1	94	90	87	84	91	88	85	83	85	82	80	
2	86	80	75	71	84	79	74	70	76	72	68	
3	80	72	66	61	78	70	65	60	68	63	59	
4	73	64	58	52	72	63	57	52	56	56	51	
5	67	57	50	45	66	56	50	45	49	49	45	
6	62	52	45	40	61	51	44	40	44	44	39	
7	58	47	40	36	56	46	40	35	39	39	35	
8	53	42	36	31	52	42	35	31	35	35	31	
9	49	38	32	27	48	38	31	27	31	31	27	
10	46	35	28	24	45	34	28	24	28	24	24	

Assembly Detail

