



# NATURALUX UV FILTERS

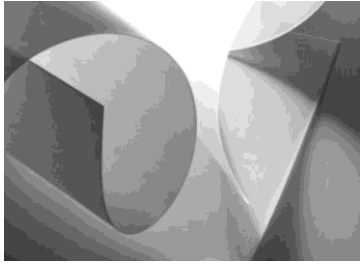

## DESCRIPTION

*NaturaLux™ Filters are available in .010" thick acrylic overlay or as a protective polycarbonate sleeve that slides over the lamp and is held in place by caps on each end of the lamp.*

*NaturaLux™ Filters are ideal for use in areas that need protection from damage caused by harmful ultraviolet rays, or in areas where UV-sensitive individuals are exposed to unfiltered fluorescent lighting.*

*NaturaLux™ Filters color correct standard cool white fluorescent lamps (4200K) to @6000K offering full spectrum lighting without having to purchase premium priced lamps.*

PART NUMBER	DESCRIPTION	MATERIAL	WIDTH	LENGTH
NL8001022	Overlay	.010 Acrylic	22-1/2	22-1/2
NL8001014	Overlay	.010 Acrylic	11 -1/4	46-1/2
NL8001024	Overlay	.010 Acrylic	22-1/2	46-1/2

NLT8-48	T8 Sleeve	Polycarbonate		4 Ft
NLT8-96	T8 Sleeve	Polycarbonate		8 Ft
NLT12-48	T12 Sleeve	Polycarbonate		4 Ft
NLT12-96	T12 Sleeve	Polycarbonate		8 Ft

### **Materials:**

#### Overlays:

*Premium matte finish acrylic, .010 thick that provides UV protection and is tinted to offer color corrected light.*

#### Sleeves:

*Tinted Polycarbonate that provides UV protection and color corrected light.*

### **Ultra Violet Absorption:**

#### Overlays:

*100% of UVA & UVB*

#### Sleeves:

*100% of UVA & UVB up to 380nm*

*80-99% above 380nm*

*50-80% between 390 & 400nm*

### **Recommended Lamp:**

*Cool White Fluorescent (4200K)*

*Daylight Fluorescent (5000K)*



## Capitol Lighting Plastics

Ph: 916.564.2788 Fax: 916.564.2702 Email: info@capitolplastics.com

SEE OUR COMPLETE ONLINE CATALOG AT:

[WWW.CAPITOLPLASTICS.COM](http://WWW.CAPITOLPLASTICS.COM)

*Capitol Lighting Plastics, Inc. assumes no responsibility for suitability of luminaries and applications. The use of these products at excessive temperatures may cause degradation of the material. It is the responsibility of the installer to insure product is installed properly and fit the fixture properly.*